




Color Door Camera




Model


UDP-300/N

- Please carefully read this User's Guide before using a product and follow instructions to use a product exactly.
- The company is not responsible for any safety accidents caused by abnormal operation of the product.

Overview





- ① Microphone
- ② White LED
- ③ Camera Lens
- ④ Speaker
- ⑤ Call Button

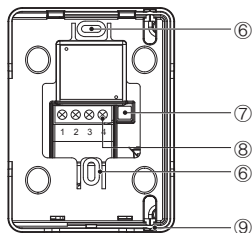

- ⑥ Screw Hole
- ⑦ Door Release Connection Wire
- ⑧ Monitor Connection Terminal
- ⑨ Wall Mount Bracket


Dimensions & Wiring

[Fig. 1]

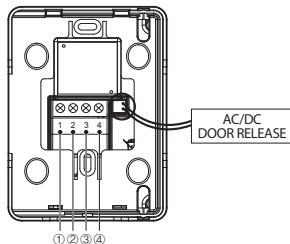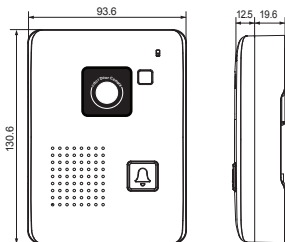

- ① POWER
- ② VOICE
- ③ VIDEO
- ④ GND

Installation

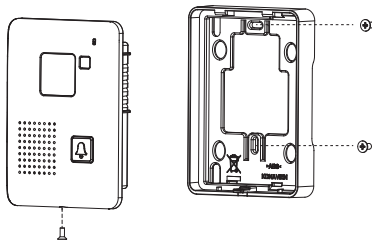

1. Fix a bracket on a wall with screws
2. Wiring #1, 2, 3, 4 on the back side of a door camera with a monitors shown in [Fig.1]
(#1: POWER, #2: VOICE, #3: VIDEO, #4: GND)
3. Put a door camera unit into a wall bracket
4. Door release connection wire as shown in [Fig.1]
5. Tighten a screw at the bottom side of a door camera. [Fig.1]

Specifications

MODEL NO.	UDP-300/N
RELATED VOLTAGE	DC 14V (Supplied from monitor)
WIRING	4 wires (polarity) to a monitor
SENSOR TYPE	CMOS image sensor
VIDEO SIGNAL	1Vp-p/75Ω, Composite PAL/NTSC
MINIMUM ILLUMINATION	0.1 Lux (300mm from camera)
LED	Embedded white LED
EFFECTIVE VIEWING ANGLE	Diagonal 73°
OPERATING TEMPERATURE	-10 °C ~ +50°C
WEIGHT (g)	260g
DIMENSIONS (mm)	93(W) x 130(H) x 31.9(D)
DISTANCE	Max 50M(TIV ø0.65)

memo



4F, KOAMI Bldg., 22,Gukhoe-daero 76-gil,Yeongdeungpo-gu,Seoul,
150-870, Korea/KD One Network Business Group.
REP.+85-2-559-8361(2) FAX. +82-2-3489-2389 Website : www.kdone.co.kr

20025833B